
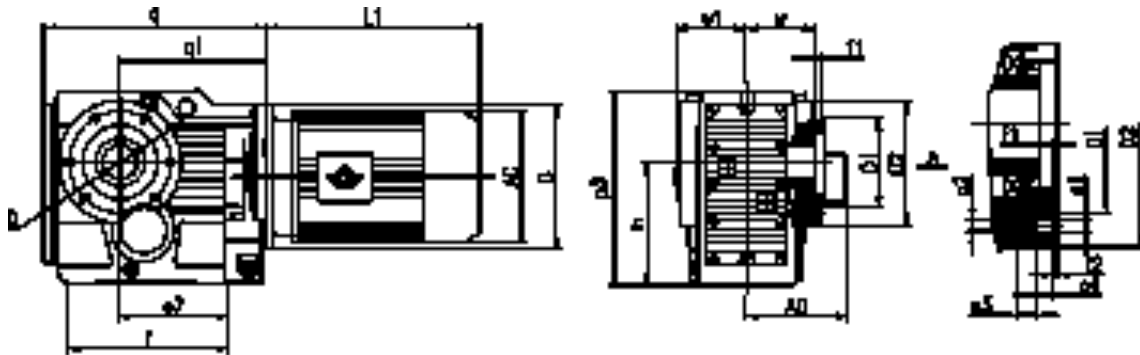


GKAZ37-157
 安装结构尺寸

GKAZ37-157
 Mounting Dimensional Description


A向法兰安装结构尺寸 (Fig.A Mounting Dimension)

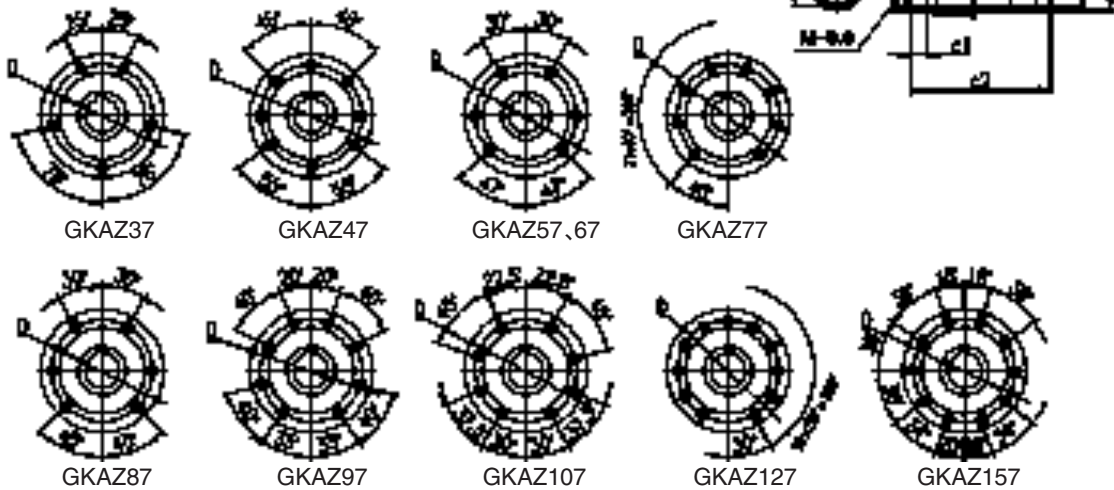

规格 Specification	q q ₁	D ₁ D ₂	h h ₁	p ₃ a ₇	f f ₁	w w ₁	d d ₁	c ₂ c ₁	t u	a ₃ a ₄	f ₂ a ₂	a ₁ D	G M	电机尺寸 Motor Size			
														AC	AD	L1	
GKAZ37	210 139	Φ 80j6 Φ 110	100 ^{-0.5} 8.5	164 97	147 9	60 63	Φ 30H7 Φ 45	105 17	33.3 8	12 11.5	3 M8	Φ 9 Φ 94	Φ 120 M10x25	见附录 A-2 Please see appendix A-2			
GKAZ47	243 166	Φ 80j6 Φ 120	112 ^{-0.5} 7.2	185 115	170 8.5	75 78	Φ 35H7 Φ 50	132 22	38.3 10	12 11	3 M8	Φ 9 Φ 102	Φ 160 M12x30				
GKAZ57	269 173	Φ 105j6 Φ 155	132 ^{-0.5} 13.1	215 120	182 9	83 86	Φ 40H7 Φ 55	142 29	43.3 12	20 12	3.5 M12	Φ 13.5 Φ 125	Φ 160 M16x40				
GKAZ67	274 179	Φ 105j6 Φ 155	140 ^{-0.5} 20	226 125	182 8.5	90 94	Φ 40H7 Φ 55	156 29	43.3 12	20 12	3.5 M12	Φ 13.5 Φ 125	Φ 160 M16x40				
GKAZ77	312 202	Φ 125j6 Φ 170	180 ^{-0.5} 31.3	286 139	204 10	105 108	Φ 50H7 Φ 70	183 32	53.8 14	20 14	3.5 M12	Φ 13.5 Φ 142	Φ 200 M16x45				
GKAZ87	390 257	Φ 155j6 Φ 215	212 ^{-0.5} 25.9	338 190	280 11	120 123	Φ 60H7 Φ 85	210 36	64.4 18	26.15	4 M16	Φ 17.5 Φ 178	Φ 250 M20x50				
GKAZ97	435 277	Φ 180j6 Φ 260	265 ^{-1.0} 32.3	414 190	298 14	150 153	Φ 70H7 Φ 95	270 34	74.9 20	26.18	4 M16	Φ 17.5 Φ 220	Φ 300 M20x50				
GKAZ107	537 341	Φ 210j6 Φ 304	315 ^{-1.0} 52	500 230	370 -8	175 178	Φ 90H7 Φ 118	313 40	95.4 25	30 22	4 M20	Φ 22 Φ 260	Φ 350 M24x60				
GKAZ127	615 390	Φ 250h6 Φ 350	375 ^{-1.0} 53	592 288	440 0	205 208	Φ 100H7 Φ 135	373 38	106.4 28	28 30	5 M20	Φ 22 Φ 300	Φ 450 M24x60				
GKAZ157	706 426	Φ 290h6 Φ 400	450 ^{-1.0} 71.7	705 298	480 -14	250 253	Φ 120H7 Φ 155	460 36	127.4 32	36 28	5 M24	Φ 26 Φ 340	Φ 550 M24x60				

注: 电机需方配或配特殊电机时需加联接法兰(见附录 D)

Note: When equipping the user's motor or the special one, the flange is required to connected.(Please see appendix D)